Buffalo WZR-HP-G450N

Modified on: Wed, 1 Jul, 2015 at 8:15 AM


Please connect an Ethernet cable from your existing router/network in to the port labelled "**Internet**" on the back of the Buffalo.

Then connect an Ethernet cable between port 1 on the back of the Buffalo and your computer




Turn on the router and wait for a few minutes

Open a web browser and type http://192.168.10.1 in to the address bar

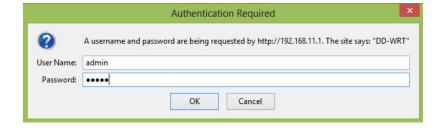

You will be prompted to log-in. The default username is "admin" and the password is "admin" (unless you have changed these).

Click on "Administration" on the left menu

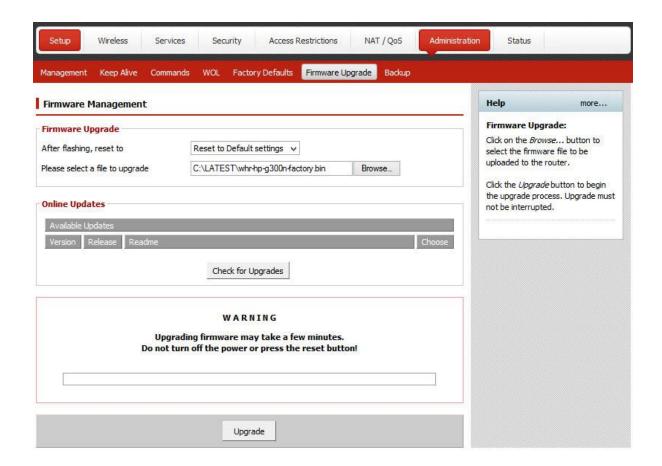

Click on "Firmware Upgrade" on the left menu

Click "Browse" and select the firmware file that you have been provided

Be sure to set the "After flashing, reset to" option to "Reset to Default Settings"

Click on "Upgrade".

The upgrade process will now begin and take up to 5 minutes to complete, and reboot



Upgrade successful.
Unit is rebooting now. Please wait a moment...